

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/6866344>

Thermal Comfort and the Heat Stress Indices

Article in *Industrial Health* · August 2006

DOI: 10.2486/indhealth.44.388 · Source: PubMed

CITATIONS

389

READS

3,046

2 authors:



Yoram Epstein

Ministry of Health (Israel)

266 PUBLICATIONS 5,428 CITATIONS

[SEE PROFILE](#)



Daniel S Moran

Sheba Medical Center

221 PUBLICATIONS 4,545 CITATIONS

[SEE PROFILE](#)

Thermal Comfort and the Heat Stress Indices

Yoram EPSTEIN* and Daniel S. MORAN

Heller Institute of Medical Research, Sheba Medical Center, Tel Hashomer and the Sackler Faculty of Medicine, Tel Aviv University, Israel

Received January 16, 2006 and accepted April 13, 2006

Abstract: Thermal stress is an important factor in many industrial situations, athletic events and military scenarios. It can seriously affect the productivity and the health of the individual and diminish tolerance to other environmental hazards. However, the assessment of the thermal stress and the translation of the stress in terms of physiological and psychological strain is complex. For over a century attempts have been made to construct an index, which will describe heat stress satisfactorily. The many indices that have been suggested can be categorized into one of three groups: “rational indices”, “empirical indices”, or “direct indices”. The first 2 groups are sophisticated indices, which integrate environmental and physiological variables; they are difficult to calculate and are not feasible for daily use. The latter group comprises of simple indices, which are based on the measurement of basic environmental variables. In this group 2 indices are in use for over four decades: the “wet-bulb globe temperature” (WBGT) index and the “discomfort index” (DI). The following review summarizes the current knowledge on thermal indices and their correlates to thermal sensation and comfort. With the present knowledge it is suggested to adopt the DI as a universal heat stress index.

Key words: Heat stress, Thermal sensation, Comfort, Thermal indices, Heat balance

Introduction

Workers, soldiers, and travelers are often exposed to severe environmental heat stress, which may deteriorate work efficiency and productivity and may even threaten survival^{1–6}. It is thus expected that the physiological heat strain experienced by an individual will be related to the total heat stress to which he is exposed, serving the need to maintain body-core temperature within a relatively narrow range of temperatures. Many attempts have been made to estimate the stress inflicted by a wide range of work conditions and climate, or to estimate the corresponding physiological strain and to combine them into a single index—a heat stress index. The difficulties in creating a universal heat stress index are outlined in the present review and a simple way to indicate the level of the environmental heat stress is proposed.

Heat Balance and Heat Exchange

An essential requirement for continued normal body function is that the deep body temperature will be maintained within a very narrow limit of $\pm 1^\circ\text{C}$ around the acceptable resting body core temperature of 37°C . To achieve this, body temperature equilibrium requires a constant exchange of heat between the body and the environment. The rate and amount of the heat exchanged is governed by the fundamental laws of thermodynamics. In general terms, the amount of heat that must be exchanged is a function of: a. the total metabolic heat produced, which for a 70 kg young male, may range from about 80 watts at rest to about 500 watts for moderately hard industrial work (and up to 1,400 watts for a very trained endurance athlete); b. the heat gained from the environment (≈ 17.5 watt per change of 1°C in ambient temperature, above or below 36°C). The amount of heat that can be exchanged is a function of sweat evaporation (≈ 18.6 watt per 1 mmHg change in ambient vapor pressure, below 42 mmHg (assuming a mean skin

*To whom correspondence should be addressed.

temperature of 36°C)).

The basic heat balance equation is:

$$\Delta S = (M - W_{ex}) \pm (R + C) - E \dots\dots\dots (eq 1)$$

Where: ΔS = change in body heat content; (M–W_{ex}) =net metabolic heat production from total metabolic heat production (W_{ex}=mechanical work); (R+C) =convective and radiative heat exchange; E=evaporative heat loss.

In the situation of thermal balance ΔS=0, then:

$$(M - W_{ex}) \pm (R + C) = E_{req} \dots\dots\dots (eq 2)$$

This form defines the required evaporation to achieve thermal balance (E_{req}).

Noteworthy, evaporative capacity of the environment is in most of the cases lower than E_{req}; and thus, the maximal evaporative capacity of the environment (E_{max}) should be considered. The ratio E_{req}/E_{max}, which denotes the required skin wettedness to eliminate heat from the body, is a “heat strain index” (HSI) that was proposed by Belding and Hatch⁷. The singular equations of E_{req} and E_{max} are beyond the scope of the present discussion; but, to solve these equations several parameters should be measured and eventually the interaction between them will define the human thermal environment.

The Six Agents of Heat Stress

It follows from the heat balance equation that ambient temperature per se is seldom the cause of heat stress; it is only one, and rarely the most important, of several factors that compose the term “heat stress”⁸. According to Fanger, the interactions of six fundamental factors define the human thermal environment and its sensation of thermal comfort⁹. These parameters are subcategorized into environmental factors and behavioral factors (Table 1). Ambient temperature, radiant temperature, humidity, and air movement are the four basic environmental variables; the metabolic rate and clothing (insulation and moisture permeability characteristics) provide the behavioral variables that affect human response to thermal environment. Thus, any consideration of thermal stress should explore these six factors.

Tradeoffs have been established between these six factors with respect to their effects on human comfort and infer the effect of five on ambient temperature (T_a)^{8, 10}:

Metabolic rate: an increase of 17.5 watt (above resting level) is equivalent to a 1°C increase in T_a.

Clothing insulation (clo): a change of 1 clo is equivalent to a change in 5°C at rest and 10°C while exercising.

Table 1. The 6 key factors in determining thermal comfort

parameter	symbol	also
Environmental		
1. Dry-bulb temperature T _o =0.5(T _a +MRT) (T _o ≈2/3T _a +1/3T _g)	(T _a)	T _o
2. Black-globe temperature MRT=(1+0.22V ^{0.5})(T _g -T _a)+T _a	(T _g)	MRT
3. Wind velocity	(V)	
4. Wet-bulb temperature	(T _w)	rh; VP
behavioral		
5. Metabolic rate	(M)	met
6. Clothing Insulation	(clo)	
Moisture permeability	(i _m)	

The conversions in this table are based on Shapiro and Epstein⁸.
rh=relative humidity, VP=vapor pressure, met=a metabolic rate unit (1 met=50 kcal/h/m²), T_o= operative temperature, an index of the combined effects of dry bulb and radiant temperature; first degree estimate for a sunny clear day is: T_o=T_a+5 (°C).
(For further information on terminology and units, the interested reader is referred to the Glossary of terms for thermal physiology⁴⁴)

Radiant temperature (MRT): a change of 1°C in MRT can be offset by a 1°C in T_a.

Wind speed: a change in 0.1 m/sec in wind speed is equivalent to a change in 0.5°C in T_a (up to 1.5°C).

Humidity: a 10% change in relative humidity can be offset by a 0.3°C in T_a.

How these tradeoffs affect the comfort temperature can be illustrated by the following example: for an individual who is exposed in the sun at 22°C (assuming this is the comfort temperature, see next section) with an increase in MRT of 5°C and who is dressed in clothing with 2 clo the equivalent air temperature (the weighted temperature to which an individual is exposed to) is 32°C. Under these conditions the comfort temperature will be 12°C (for further details cf Ref 10).

Thermal Comfort

Thermal comfort is defined as: “that condition of mind which expresses satisfaction with the thermal environment”^{11, 12}. According to this definition comfort is a subjective sensation. Based on ASHRAE definition the zone of thermal comfort is the span of conditions where 80% of sedentary or slightly active persons find the environment thermally acceptable¹³. In terms of climatic conditions the acceptable ambient temperature of comfort

would be slightly higher in the summer than in the winter, being 23–27°C and 20–25°C, respectively¹³).

Fanger (1970) defined 3 parameters for a person to be in thermal comfort: a. the body is in heat balance; b. sweat rate is within comfort limits; c. mean skin temperature is within comfort limits⁹). These conceptual requisites for determining thermal comfort can be expressed by measurable terms as: body-core temperature within a very narrow range of 36.5–37.5°C, a skin temperature of 30°C at the extremities and 34–35°C at body stem and head, and the body will be free of sweating^{1, 14}). Any deviation from these assertions results in sensation of discomfort. In reference to equation 1, thermal comfort will be attained when the rate of heat dissipation from the body by means of radiation and convection (cardiovascular tone) will equal the rate of metabolic heat production and, consequently, heat storage (ΔS) will be nil. In other words heat stress results from imbalance between the demands imposed on the worker by the task and the environment, and the worker's capacity to eliminate the heat load as modified by clothing¹⁵). It follows that thermal comfort is directly related to sweat evaporation. This can be expressed by the ratio of demand to capacity (E_{req}/E_{max}). As this ratio exceeds 0.2 (20%), the worker is moved from a "comfort" condition to "discomfort". As the ratio increases to 0.4–0.6, the worker is subject to performance decrements. Above 0.6, work will be usually discontinued or will be performed for only a limited period and above 0.8 there is substantial risk of heat illness¹⁵).

Thermal sensation and thermal comfort are bipolar phenomena ranging from "too cold" to "too hot" with comfort or neutral sensation in the middle. This continuum of sensations has been described by several scales^{9, 11, 12, 16, 17}). The subjective ratings of discomfort and the corresponding physiological correlates are summarized in Table 2.

Throughout the twentieth century and into the twenty first century there has been an active research on: what conditions will produce thermal comfort and how to grade heat stress. These efforts resulted in various models attempting to describe thermal comfort. These studies have not been conducted only for their scientific merit but rather to establish safety limits and to increase productivity.

Indices for Assessing Heat Stress

A heat stress index is a single value that integrates the effects of the basic parameters in any human thermal environment such that its value will vary with the thermal strain experienced by the individual¹⁸). In 1905 Haldane was probably the first in suggesting that the wet-bulb

temperature is, as a single value, the most appropriate measure to express heat stress¹⁹). Since then a large number of indices have been suggested; about 40 indices are listed in Table 3, and there are probably many others, which have been suggested and are (or were) in use throughout the world. At first the purpose of the index was limited to the estimation of the combined effect of environmental variables. Later, the effects of metabolic rate and clothing were also taken into account. Noteworthy, the efforts to assess heat stress by a single value that will combine several variables continue, although already in the 1970s' Belding and then Gagge and Nishi concluded that there cannot be a universal valid system for rating heat stress, mainly because of the number and complexity of interaction of determining factors^{20, 21}).

To be applicable an index must meet the following criteria²²):

- a. feasible and accurate at wide range of environmental and metabolic conditions.
- b. consider all important factors (environmental, metabolic, clothing etc).
- c. relevant measurements should reflect the worker's exposure, without interfering with his performance.
- d. exposure limits should be reflected by physiologic and/or psychological responses reflecting increased risk to safety or health.

Heat stress indices can be divided into 3 groups, according to their rationale^{18, 22}): indices that are based on calculations involving the heat balance equation ("rational indices"), indices that are based on objective and subjective strain ("empirical indices"), and indices based on direct measurements of environmental variables ("direct indices"). Obviously, indices of the first two groups are more difficult to implement in work places, since they evolve too many variables and some of them require invasive measurements. The third group of indices is more friendly and applicable since these indices are based on monitoring environmental variables.

The most comprehensive indices are those that are based on the heat balance equation ("rational indices"). These indices integrate all environmental and behavioral variables, which have been stated above. However, since there is no practical way to record all the elements that are required to solve the heat balance equation some of the parameters are assumed or regarded as constants. Such is the case, for example, with the "heat stress index" (HSI) that was proposed by Belding and Hatch and is based on a constant skin temperature of 35°C⁷).

It appears that over the years too much emphasis has been placed on the academic accuracy of an index at the expense

Table 2. Comfort vote and thermal sensation, in association to the physiological zone of thermal effect and the associated percent skin wettedness

Vote	Thermal sensation	Comfort sensation	Zone of thermal effect	HSI	
(a) (b)	(c)	(d)	(e)	(f)	
	9	Very hot	Very uncomfortable	Incompensable heat	80
+3	8	hot	uncomfortable		40–60
+2	7	warm	Slightly uncomfortable	Sweat evaporation	20
+1	6	Slightly warm		compensable	
0	5	neutral	comfortable	Vasomotor compensable	0
-1	4	Slightly cool		Shivering compensable	
-2	3	Cool	Slightly uncomfortable		
-3	2	cold			
	1	Very cold	uncomfortable	Incompensable cold	

Based on: Goldman⁴⁵⁾ and Shapiro and Epstein⁸⁾.

a. Thermal scale according to ASRAE 55¹¹⁾.

b. Thermal scale according to Rohles¹⁷⁾.

f. The “heat strain index” (HSI) is the ratio of demand for sweat evaporation to capacity of evaporation (E_{req}/E_{max})⁷⁾. This denotes also the percent of skin wettedness, which is a good predictor of warm discomfort⁴⁶⁾.

of practicability. In reality, the prevailing conditions in work places are not uniform, as they are under laboratory conditions. In such a case work is performed under varying degrees of physical work load, heat stress, and work periods. Other confining factors may be different types of clothing, gender, degree of acclimatization age, etc. Therefore, in the writers’ view, the use of a “direct index” together with appropriate, simple, and practical guidelines accounting for work intensity and clothing is the preferred way of expressing thermal stress.

The “Direct Indices”

The ability to construct safety regulations become rather complex, if simultaneously four environmental parameters, a work rate, and a specified clothing level has to be considered. It is, therefore, imperative to consider simplified ways of obtaining an estimate of thermal balance, causing changes in body heat content. This can be achieved by using an index that is based on direct measurements of environmental variables, which is used to “simulate” heat strain.

Following this concept Houghton and Yaglou proposed already in 1923 the effective temperature (ET)²³⁾. This index was originally established to provide a method for determining the relative effects of air temperature and humidity on comfort. In 1932 Vernon and Warner substituted the dry-bulb temperature with a black-globe temperature to allow radiation to be taken into account (the “corrected

effective temperature” (CET))²⁴⁾. Since then many modifications were made to this basic index. For the present discussion two indices, which are in daily use for many years are regarded.

The wet-bulb globe temperature (WBGT) index:

The wet-bulb globe temperature (WBGT) is by far the most widely used heat stress index throughout the world. It was developed in the US Navy as part of a study on heat related injuries during military training²⁵⁾. The WBGT index, which emerged from the “corrected effective temperature” (CET)²⁴⁾ consists of weighting of dry-bulb temperature (T_a) wet-bulb temperature (T_w) and black-globe temperature (T_g), in the following manner:

$$WBGT=0.7T_w+0.1T_a+0.2T_g \dots\dots\dots (Eq. 3)$$

For indoor conditions the index was modified as follows:

$$WBGT=0.7T_w+0.3T_g \dots\dots\dots (Eq. 4)$$

(for indoor purposes, when $T_g \approx T_a$, then $WBGT=0.7T_w+0.3T_a$)

The coefficients in this index have been determined empirically and the index has no physiological correlates; but, it was found that heat casualties and the time lost due to cessation of training in the heat were both reduced by using this index. This index is recommended by many international organizations for setting criteria for exposing workers to hot environment and was adopted as an ISO standard (ISO 7243)^{26–31)}.

Table 3. Proposed systems for rating heat stress and strain (heat stress indices)

Year	Index	Author(s)
1905	Wet-bulb temperature (T_w)	Haldane ¹⁹⁾
1916	Katathermometer	Hill <i>et al.</i> ⁴⁷⁾
1923	Effective temperature (ET)	Houghton & Yaglou ²³⁾
1929	Equivalent temperature (T_{eq})	Dufton ⁴⁸⁾
1932	Corrected effective temperature (CET)	Vernon & Warner ²⁴⁾
1937	Operative temperature (OpT)	Winslow <i>et al.</i> ⁴⁹⁾
1945	Thermal acceptance ratio (TAR)	Ionides <i>et al.</i> ⁵⁰⁾
1945	Index of physiological effect (E_p)	Robinson <i>et al.</i> ⁵¹⁾
1946	Corrected effective temperature (CET)	Bedford ⁵²⁾
1947	Predicted 4-h sweat rate (P4SR)	McArdel <i>et al.</i> ⁵³⁾
1948	Resultant temperature (RT)	Missenard <i>et al.</i> ⁵⁴⁾
1950	Craig index (I)	Craig ⁵⁵⁾
1955	Heat stress index (HIS)	Belding & Hatch ⁷⁾
1957	Wet-bulb globe temperature (WBGT)	Yaglou & Minard ²⁵⁾
1957	Oxford index (WD)	Lind & Hellon ³⁴⁾
1957	Discomfort index (DI)	Thom ³⁶⁾
1958	Thermal strain index (TSI)	Lee & Henschel ⁵⁶⁾
1959	Discomfort index (DI)	Tennenbaum <i>et al.</i> ³⁹⁾
1960	Cumulative discomfort index (CumDI)	Tennenbaum <i>et al.</i> ³⁹⁾
1960	Index of physiological strain (I_s)	Hall & Polte ⁵⁷⁾
1962	Index of thermal stress (ITS)	Givoni ⁵⁸⁾
1966	Heat strain index (corrected) (HSI)	McKarns & Brief ⁵⁹⁾
1966	Prediction of heart rate (HR)	Fuller & Brouha ⁶⁰⁾
1967	Effective radiant field (ERF)	Gagge <i>et al.</i> ⁶¹⁾
1970	Predicted mean vote (PMV)	Fanger ⁹⁾
	Threshold limit value (TLV)	
1970	Prescriptive zone	Lind ⁶²⁾
1971	New effective temperature (ET'')	Gagge <i>et al.</i> ⁶³⁾
1971	Wet globe temperature (WGT)	Botsford ⁶⁴⁾
1971	Humid operative temperature	Nishi & Gagge ⁶⁵⁾
1972	Predicted body core temperature	Givoni & Goldman ⁶⁶⁾
1972	Skin wettedness	Kerslake ⁶⁷⁾
1973	Standard effective temperature (SET)	Gagge <i>et al.</i> ⁶⁸⁾
1973	Predicted heart rate	Givoni & Goldman ⁶⁹⁾
1978	Skin wettedness	Gonzales <i>et al.</i> ⁷⁰⁾
1979	Fighter index of thermal stress (FITS)	Nunneley & Stribley ⁷¹⁾
1981	Effective heat strain index (EHSI)	Kamon & Ryan ⁷²⁾
1982	Predicted sweat loss (m_{sw})	Shapiro <i>et al.</i> ⁷³⁾
1985	Required sweating (SW_{req})	ISO 7933 ⁷⁴⁾
1986	Predicted mean vote (modified) (PMV'')	Gagge <i>et al.</i> ⁷⁵⁾
1996	Cumulative heat strain index (CHSI)	Frank <i>et al.</i> ⁷⁶⁾
1998	Physiological strain index (PSI)	Moran <i>et al.</i> ⁷⁷⁾
1999	Modified discomfort index (MDI)	Moran <i>et al.</i> ⁷⁸⁾
2001	Environmental stress index (ESI)	Moran <i>et al.</i> ⁷⁹⁾
2005	Wet-bulb dry temperature (WBDDT)	Wallace <i>et al.</i> ⁸⁰⁾
2005	Relative humidity dry temperature (RHDT)	Wallace <i>et al.</i> ⁸⁰⁾

Based on the WBGT index the American Conference of Government Industrial Hygienists (ACGIH) published the “permissible heat exposure threshold limits values” (TLV), which refer to those heat stress conditions under which nearly all workers may be repeatedly exposed without adverse health effects²⁸. These criteria were adopted also by the Occupational Safety and Health Administration (OSHA) and the American Industrial Hygiene Association (AIHA)^{29, 30}. The American College of Sports Medicine (ACSM) and the US Army published guidelines of exercising under various levels of heat stress^{31, 32} (see appendix).

Yet, inherent limitation of the WBGT is its applicability across a board range of potential scenarios and environments, because of the inconvenience of measuring T_g . The black-globe temperature is measured by a temperature sensor placed in the center of a thin copper matt-black globe (diameter: 150 mm). In many circumstances measuring T_g is cumbersome and impractical^{22, 33}.

The discomfort index (DI)

The question arises to what extent the black-globe temperature is essential in the determination of environmental heat stress. In 1957 Lind and Hellon proposed the “Oxford index” (WD)—a simple direct index based on a weighted summation of aspirated wet-bulb temperature (T_w) and dry-bulb temperature (T_a) in the following form³⁴:

$$WD=0.85T_w+0.15T_a \dots\dots\dots (Eq. 3)$$

The weighting of 85% of the effect on T_w appears to reflect man’s reliance on sweat evaporation for temperature regulation in hot environment. The reflection of this index on physiological strain was demonstrated by showing a very high correlation with the physiological tolerance time (time to reach rectal temperature of 39.2°C and/or heart rate of 180 bmp), for resting unclothed men³⁵. Though this index is easy to use it was argued that it is not appropriate where there is significant thermal radiation¹⁸. Nevertheless, because of its easiness to use under field/industrial conditions, this approach is appealing and other indices, which are based on the same concept were proposed (Table 4). These indices differ from each other by the relative weight of the two components to the index value, compensating in part for the lack of measuring the effect of radiant temperature.

Recognizing that the WBGT is still the index adopted by international authorities, we correlated the six indices in Table 4 with the WBGT index, using a randomly set of measurements (n=108). It is obvious that all indices highly correlate to the WBGT with r^2 values that range from 0.930 to 0.967.

Table 4. “Direct indices” that are based on wet-bulb and dry-bulb temperatures

Index	Formula
Oxford index (WD) ³⁴	$0.85T_w+0.15T_a$
Discomfort index (DI) ³⁶	$0.4T_w+0.4T_a+8.3$
Discomfort index (DI) ³⁹	$0.5T_w+0.5T_a$
Fighter index of thermal stress (FITS) ⁷¹	$0.83T_w+0.35T_a+5.08$
Modified discomfort index (MDI) ⁷⁷	$0.75T_w+0.3T_a$
Wet-bulb dry temperature (WBDT) ⁷⁹	$0.4T_w+0.6T_a$

The values calculated by these indices highly correlate with the values of the WBGT index, with r^2 values of 0.930–0.967.

From the six indices that are presented in Table 4, the index that is of special interest is the discomfort index (DI), which is the only index, beside the WBGT that is in daily use for more than 4 decades. The DI was originally proposed by Thom³⁶ and was slightly modified by Sohar et al, as follows³⁷:

$$DI=0.5T_w+0.5T_a \dots\dots\dots (Eq. 4)$$

In its present form (eq. 4), The DI was found to be highly correlated to the effective temperature (ET) index³⁸. More importantly, the DI correlated to sweat rate both at rest and under exercise, reflecting its physiological significance³⁹. The DI values are very similar to those of the WBGT index as depicted in Fig 1, with an r^2 value of 0.9466 and even a higher correlation with no y intercept ($r^2=0.999$; SE=0.0035).

Based on a great number of observations on a wide spectrum of population groups and under different climatic conditions, the following criteria were established to characterize the environmental heat stress and the correlate thermal sensation: under DI values of 22 units no heat stress is encountered. Between 22–24 units most people feel a mild sensation of heat; between 24–28 units the heat load is moderately heavy, people feel very hot, and physical work may be performed with some difficulties. Above 28 units the heat load is considered severe, and people engaged in physical work are at increased risk for heat illness (heat exhaustion and heat stroke)^{40, 41}. The Israel Defense Forces (IDF) and the Israeli Ministry of Education adopted this classification and published accordingly guidelines for exercising in the heat. For example, guidelines for fluid consumption can be set by work intensity and the grade of heat stress⁴².

Depending on the application the use of the DI enables the determination of the heat load at any given time. It may also be expressed as a daily minimum and maximum as well as the total daily heat load or sub-divided to mild moderate

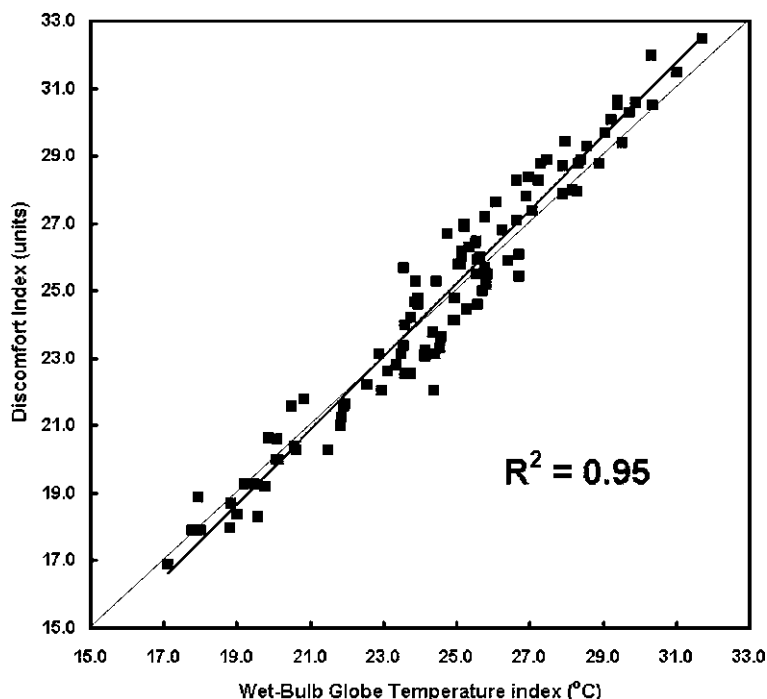


Fig 1. The correlation between the WBGT and DI values (n=108).

and severe heat load. Equally, the data can be calculated for a month, season, or even a whole year^{37, 43}. To illustrate the use of the DI the mean hourly heat load in two cities in Israel were compared: Tel Aviv, which has a Mediterranean climate (hot/humid) and Beer Sheba, which is situated on the edge of the desert. The profile of the heat load in August is different in Tel Aviv than in Beer Sheba^{40, 43}. In August, for example, there are in Tel Aviv 12 h of moderate heat load, 8 h of mild heat load and only 4 h without any heat load. In Beer Sheba there is a mean of nine hours daily of moderate and three hours of mild heat load; during 12 h there is no heat load at all. This shows that the climate in Beer Sheba is more comfortable than in Tel Aviv although the mean monthly ambient temperatures in Beer Sheba is higher than in Tel Aviv (31.2°C vs 29.5°C, respectively)⁴⁰. By connecting all locations that show similar pattern of heat load a climatologic base-map of a country or an area can be drawn^{36, 40}. From a biometeorological perspective this form is more logic than to describe ambient temperature and humidity separately.

Presenting heat stress in terms of environmental heat load with the appropriate physiological significance and the appropriate TLVs or other safety measures is a step forward in increasing productivity and reducing health hazards related to heat stress. Likewise, describing an area by the prevailing heat load is beneficial in comparing regions based on thermal

comfort (i.e. using of air conditioning etc). For both applications the DI was found to be very satisfactory in Israel. Its application worldwide deserves further investigation.

Summary

During the last century agronomists, physiologists, and biometeorologists have attempted to propose an index that will accurately define heat stress and the zones of discomfort. These efforts were not purely academic but rather to establish safety criteria for workers who are exposed to heat stress (metabolic or environmental). The many indices that were proposed could be grouped into “rationale indices”, “empirical indices”, and “direct indices”. While the first 2 groups are sophisticated indices, which require for their calculation the use of many physiological and environmental factors, the third group is based on the measurement of basic environmental variables. It is apparent that the “direct indices” and the “empirical indices” are more comprehensive than the “direct indices”, but their practicality in daily use is questionable. Therefore, it is in the writers’ mind that a simple and easy to use “direct index”, which although lacks the integration of many of the variables, together with appropriate regulations that consider the effects of work intensity, acclimation, and clothing is advantageous over the other indices. In this group, two indices are in daily use

for more than four decades: the WBGT index and the DI. The WBGT index was adopted by many international establishments, but is cumbersome to use. The DI, although it does not account directly for radiation, is easy to use and is in use in Israel very satisfactorily. It is suggested to adopt this index and test its applicability also by others.

References

- 1) Wing JF (1965) Upper thermal tolerance limits for unimpaired mental performance. *Aerospace Med* **36**, 960–64.
- 2) Allnutt MF, Allan JR (1973) The effects of core temperature elevation and thermal sensation on performance. *Ergonomics* **16**, 189–96.
- 3) Epstein Y, Keren G, Moisseiev J, Gasko O, Yachin S (1980) Psychomotor deterioration during exposure to heat. *Aviat Space Environ Med* **51**, 607–10.
- 4) Adolph EF and associates (1969) *Physiology of man in the desert*, Hafner Publ Comp, New York.
- 5) Shibolet S, Lancaster MC, Danon Y (1976) Heat stroke: a review. *Aviat Space Environ Med* **47**, 280–301.
- 6) Bell PA (1981) Physiological, comfort, performance, and social effects of heat stress. *J Soc Issues* **37**, 71–94.
- 7) Belding HS, Hatch TF (1955) Index for evaluating heat stress in terms of resulting physiological strain. *Heat Pip Air Condit* **27**, 129–36.
- 8) Shapiro Y, Epstein Y (1984) Environmental physiology and indoor climate—thermoregulation and thermal comfort. *Energy Build* **7**, 29–34.
- 9) Fanger PO (1970) *Thermal comfort*, Danish Technical Press, Copenhagen.
- 10) Goldman RF (2001) Introduction to heat-related problems in military operations. In: *Textbook of military medicine: medical aspects of harsh environments Vol. 1*, Pandolf KB, Burr RE (Eds.), 3–49, Office of the Surgeon General, Department of the Army, Washington DC.
- 11) ASHRAE (1966) *Thermal comfort conditions*, ASRAE standard 55.66, New York.
- 12) ISO 7730 (1984) *Moderate thermal environments—determination of the PMV and PPD indices and specification of the conditions for thermal comfort*. ISO, Geneva.
- 13) ASHRAE (1992) *Thermal environmental conditions for human occupancy*. ANSI/ASHRAE standards, Atlanta.
- 14) Hensel H (1981) *Thermoreception and temperature regulation*, 176, Academic Press, London.
- 15) Goldman RF (1988) Standards for human exposure to heat. In: *Environmental ergonomics*, Mekjavic IB, Banister EW, Morrison JB (Eds.), 99–138, Taylor & Francis, Philadelphia.
- 16) Bedford T (1936) *The warmth factor in comfort at work: a physiological study of heating and ventilation*. Industrial Health Research Board No 76, HMSO, London.
- 17) Rohles FJ, Levins R (1971) The nature of thermal comfort for sedentary man. *ASHRAE Trans* **77**, 239–46.
- 18) Parsons K (2003) *Human thermal environments*, 2nd Ed., 258–92, Taylor & Francis, London.
- 19) Haldane JS (1905) The influence of high air temperature *J Hyg* **5**, 494–513.
- 20) Belding HS (1970) The search for a universal heat stress index. In: *Physiological and behavioral temperature regulation*, Hardy JD, Gagge AP, Stolwijk JAJ (Eds.), 193–202, Charles C Thomas, Springfield.
- 21) Gagge AP, Nishi Y (1976) Physical indices of the thermal environment. *ASHRAE J* **18**, 47–51.
- 22) NIOSH (1986) *Criteria for a recommended standard: occupational exposure to hot environment*. DHHS (NIOSH) Publication No 86–113, 101–10, National Institute for Occupational Safety and Health, Washington DC.
- 23) Houghton FC, Yaglou CP (1923) Determining equal comfort lines. *J Am Soc Heat Vent Engrs* **29**, 165–76.
- 24) Vernon HM, Warner CG (1932) The influence of the humidity of the air on capacity for work at high temperatures. *J Hyg* **32**, 431–62.
- 25) Yaglou CP, Minard D (1957) Control of heat casualties at military training centers. *Am Med Ass Arch Ind Hlth* **16**, 302–16.
- 26) NIOSH (1972) *Occupational exposure to hot environment*. National Institute for Occupational Safety and Health, HSM 72-10269. Department of Health, Education, and Welfare, Washington DC.
- 27) ISO 7243 (1982) *Hot environments—estimation of the heat stress on working man, based on the WBGT-index (wet bulb globe temperature)*. ISO, Geneva.
- 28) ACGIH (2004) *TLVs and BELs. Threshold limit values for chemical substances and physical agents and biological exposure indices*, 168–76, ACGIH Signature Publications, Cincinnati.
- 29) US Department of Labor (1999) *OSHA Technical manual (OTM) (TED 01-00-015)*, section III chapter 4: heat stress, US Department of Labor, Washington DC.
- 30) AIHA (1975) *Heat exchange and human tolerance limits*. In: *Heating and cooling for man in industry*, 2nd Ed., 5–28, American Industrial Hygiene Association, Arkon.
- 31) Armstrong LE, Epstein Y, Greenleaf JE, Haymes EM, Hubbard RW, Roberts WO, Thompson PD (1996) ACSM Position stand: heat and cold illnesses during distance running. *Med Sci sports Exerc* **28**, i–x.
- 32) Department of the Army (1980) *Prevention, treatment, and control of heat injury*, 1–21, Technical Bulletin No TB Med 507, Department of the Army, Washington DC.
- 33) Moran DS, Pandolf KB (1999) Wet bulb globe temperature (WBGT)—to what extent is GT essential. *Aviat Space Environ Med* **70**, 480–4.
- 34) Lind AR, Hallon RF (1957) Assessment of physiologic severity of hot climate. *J Appl Physiol* **11**, 35–40.
- 35) Goldman RF (1973) Environmental limits, their prescription and proscription. *Int J Environ Studies* **5**, 193–204.
- 36) Thom EC (1959) The discomfort index. *Weatherwise* **12**, 57–60.
- 37) Sohar E, Adar R, Kaly J (1963) Comparison of the

- environmental heat load in various parts of Israel. Bull Res Counc Israel **10E**, 111–5.
- 38) Sohar E, Tennenbaum DJ, Robinson N (1962) A comparison of the cumulative discomfort index (Cum DI) and cumulative effective temperature (Cum ET), as obtained by meteorological data. In: Biometeorology, Tromp SW (Ed.), 395–400, Pergamon Press, Oxford.
 - 39) Tennenbaum J, Sohar E, Adar R, Gilat T, Yaski D (1961) The physiological significance of the cumulative discomfort index (Cum DI). Harefuah **60**, 315–9.
 - 40) Sohar E (1979) Man in the desert. In: Arid zone settlement planning—the Israeli experience, Golani G (Ed.), 477–518, Pergamon Press, New York.
 - 41) Shapiro Y, Seidman DS (1990) Field and clinical observations of exertional heat stroke patients. Med Sci Sports Exerc **22**, 6–14.
 - 42) Epstein Y, Moran DS (2004) Extremes of temperature and hydration. In: Travel Medicine, Keystone JS, Kozarsky PE, Freedman DO, Nothdurft HD, Conner BA (Eds.), 383–92, Mosbey, Edinburgh.
 - 43) Sohar E (1982) Men, microclimate and society. Energy Build **4**, 149–54.
 - 44) IUPS Thermal Commission (2001) Glossary of terms for thermal physiology. Jap J Physiol **51**, 245–80.
 - 45) Goldman RF (1982) Thermal comfort in an era of energy shortage. In: Selected sensory methods: problems and approaches to measuring hedonics, Kuznicki JT, Johnson RA (Eds.), 64–98, Am Soc Test Materials, Philadelphia.
 - 46) Gonzalez RR, Gagge AP (1973) Magnitude estimates of thermal discomfort during transients of humidity and operative temperature (ET*). ASHRAE Trans **79**, 89–96.
 - 47) Hill L, Griffith O, Flack M (1916) The measurement of the rate of heat loss at body temperature by convection, radiation and evaporation. Phil Trans Royal Soc **207(B)**, 183–220.
 - 48) Dufton AF (1929) The eupatheostat. J Sci Instrum **6**, 249–51.
 - 49) Winslow CEA, Herrington LP, Gagge AP (1938) Physiological reactions and sensations of pleasantness under varying atmospheric conditions. Trans ASHVE **44**, 179–96.
 - 50) Ionides M, Plummer J, Siple PA (1945) The thermal acceptance ratio. Interm report No 1, Climatology and Environmental Protection section US OQMG.
 - 51) Robinson S, Turrell ES, Gerking S D (1945) Physiologically equivalent conditions of air temperature and humidity. Am J Physiol **143**, 21–32.
 - 52) Bedford T (1946) Environmental warmth and its measurement. Med Res Council Memo 17. HMSO, London.
 - 53) McArdle B, Dunham W, Holling HE, Ladel WSS, Scott JW, Thomson ML, Weiner JS (1947) The prediction of the physiological effects of warm and hot environments. Med Res Council, London RNP Report 47/391, London.
 - 54) Missenard A (1948) A thermique des ambiances: équivalences de passage, équivalences de séjours. Chaleur Indust **276**, 159–72 (in French).
 - 55) Craig (1950) Relation between heat balance and physiological strain in walking men clad in ventilated impermeable envelope. Fed Proc **9**, 26.
 - 56) Lee DHK (1958) Proprioclimates of man and domestic animals. In: Climatology, Arid zone research—X, 102–25, UNESCO, Paris.
 - 57) Hall JFK, Polte W (1960) Physiological index of strain and body heat storage in hyperthermia. J Appl Physiol **15**, 1027–30.
 - 58) Givoni B (1962) The influence of work and environmental conditions on the physiological responses and thermal equilibrium of man. In: Proceedings of UNESCO Symposium on Environmental Physiology and Psychology in Arid Conditions, 199–204, Lucknow.
 - 59) McKarns JS, Brief RS (1966) Nomographs give refined estimate of heat stress index. Heat Pip Air Cond **38**, 113–6.
 - 60) Fuller FH, Brouha L (1966) New engineering methods for evaluating the job environment. ASHRAE J **8**, 39–52.
 - 61) Gagge AP, Rapp GM, Hardy JD (1967) Effective radiant field and operative temperature necessary for comfort with radiant heating. ASHRAE Trans **73**, 2.1–9.
 - 62) Lind AR (1970) Effect of individual variation on upper limit of prespective zone of climates. J Appl Physiol **28**, 57–62.
 - 63) Gagge A, Stolwijk A, Nishi Y (1971) An effective temperature scale based on a simple model of human physiological regulatory response. ASHRAE Trans **77**, 247–57.
 - 64) Botsford JH (1971) A wet globe thermometer for environmental heat measurement. Am Ind Hyg Assoc J **32**, 1–10.
 - 65) Nishi Y, Gagge AP (1971) Humid operative temperature. A biophysical index of thermal sensation and discomfort. J Physiol (Paris) **63**, 365–8.
 - 66) Givoni B, Goldman RF (1972) Predicting rectal temperature response to work, environment, and clothing. J Appl Physiol **32**, 812–22.
 - 67) Kerslake DM (1972) The stress of hot environment. Cambridge University Press, Cambridge.
 - 68) Gonzalez RR, Nishi Y, Gagge AP (1974) Experimental evaluation of standard effective temperature: a new biometeorological index of man's thermal discomfort. Int J Biomtrrol **18**: 1–15.
 - 69) Givoni B, Pandolf RR (1973) Predicting heart rate response to work, environment and clothing. J Appl Physiol **34**, 201–4.
 - 70) Gonzalez RR, Bergulnd LG, Gagge AP (1978) Indices of thermoregulatory strain for moderate exercise in the heat. J Appl Physiol **44**, 889–99.
 - 71) Nunneley SH, Stribley F (1979) Fighter index of thermal stress (FITS): guidance for hot-weather aircraft operations. Aviat Space Environ Med **50**, 639–42.
 - 72) Kamon E, Ryan C (1981) Effective heat strain index using pocket computer. Am Ind Hyg Assoc J **42**, 611–5.
 - 73) Shapiro Y, Pandolf KB, Goldman RF (1982) Predicting sweat loss response to exercise, environment and clothing. Eur J Appl Physiol Occup Physiol **48**, 83–96.
 - 74) ISO 7933 (1989) Hot environments—analytical determination and interpretation of thermal stress using calculation of

required sweat rate. ISO, Geneva.

75) Gage AP, Fobelets AP, Berglund LG (1986) A standard predictive index of human response to the thermal environment. *ASHRAE Trans* **92**, 709–31.

76) Frank A, Moran D, Epstein Y, Belokopytov M, Shapiro Y (1996) The estimation of heat tolerance by a new cumulative heat strain index. In: *Environmental Ergonomics: Recent progress and new frontiers*, Shapiro Y, Moran D, Epstein Y (Eds.), 194–7, Freund Pub House, London.

77) Moran DS, Shitzer A, Pandolf KB (1998) A physiological strain index to evaluate heat stress. *Am J Physiol* **275**, R129–34.

78) Moran DS, Shapiro Y, Epstein Y, Matthew W, Pandolf KB (1998) A modified discomfort index (MDI) as an alternative to the wet bulb globe temperature (WBGT). In: *Environmental Ergonomics VIII*, Hodgdon JA, Heaney JH, Buono MJ (Eds.), 77–80, Int Conf Environ Ergo, San Diego.

79) Moran DS, Pandolf KB, Shapiro Y, Heled Y, Shani Y, Matthew WT, Gonzales RR (2001) An environmental stress index (ESI) as a substitute for the wet bulb globe temperature (WBGT). *J Thermal Biol* **26**, 427–31.

80) Wallace RF, Kriebel D, Punnett L, Wegman DH, Wenger CB, Gardner JW, Gonzales RR (2005) The effects of continuous hot weather training on risk of exertional heat illness. *Med Sci Sports Exerc* **37**, 84–90.

81) USARIEM (2005) Heat injury prevention program. Appendix 1: Commander’s, senior NCO’s, and instructor’s guide to risk management of heat casualties. Available from: <http://www.usariem.army.mil/HealthInjury.htm>. Accessed April, 2005.

Appendix

Current guidelines of working/exercising under the various levels of heat load as specified in terms of WBGT index (°C)

American Conference of Governmental Industrial Hygienists (ACGIH)²⁸⁾

Work demands	acclimated				non-acclimated			
	L	M	H	VH	L	M	H	VH
100% work	29.5	27.5	26.0		27.5	25.0	22.5	
75% work; 25% rest	30.5	28.5		27.5	29.0	26.5	24.5	
50% work; 50% rest	31.5	29.5	28.5	27.5	30.0	28.0	26.5	25.0
25% work; 75% rest	32.5	31.0	30.0	29.5	31.0	29.0	28.0	26.5

Work demands: L=light work; M=moderate work; H= heavy work; VH=very heavy work.
 WBGT additions for clothing type are as follows: summer work uniform=0; woven material overalls=+3.5; double- cloth overall= +5.

American College of Sports Medicine (ACSM)³¹⁾

Level of risk	WBGT (°C)
Very high	Above 28
High	23–28
Moderate	18–23
Low	Below 18

The risk of heat illness for runners while wearing shorts, socks, shoes and t-shirt.

US Department of the Army⁸¹⁾

Heat category (flag)	WBGT (°C)	Easy work		Moderate work		Hard work	
		Work/rest (min)	Water intake (ml/h)	Work/rest (min)	Water intake (ml/h)	Work/rest (min)	Water intake (ml/h)
1 (White)	25.6–27.7	NL	500	NL	750	40/20 (70)*	750
2 (Green)	27.8–29.4	NL	500	50/10 (150)	750	30/30 (65)	1000
3 (Yellow)	29.5–31.0	NL	750	45/15 (100)	750	30/30 (55)	1000
4 (Red)	31.1–32.1	NL	750	30/30 (80)	750	20/40 (50)	1000
5 (Black)	>32.2	50/10	1000	20/40 (70)	1000	10/50 (45)	1000

The table refers to heat acclimated soldiers wearing battledress uniform (BDU).

The work-rest times and fluid replacement volumes will sustain performance and hydration for at least 4 h of work in the specified heat category.

Fluid needs can vary based on individual differences (\pm 250 ml/h) and exposure to full sun or full shade (\pm 250 ml/h).

NL=no limit to work time per hour.

*=continuous work (add 250 ml/h to fluid consumption).

If wearing body armor add 2.5°C to WBGT in humid climates. If wearing NBC clothing (mission-oriented protective posture (MOPP 4)), add 5°C to WBGT index for easy work, and 10°C to WBGT index for moderate and hard work.

Guidelines in Israel as specified by DI⁴⁰⁾

Level	DI	Significance
Light	22–24	Mild sensation of heat
Moderate	24–28	Physical work is performed with some difficulties
Severe	>28	Body temperature cannot be maintained during physical work. High risk for heat illness

For workers dressed in light summer clothing.

15 min rest during each hour of exercise. Under severe heat load physical work is not tolerable.

Fluid consumption ml/h in regard to heat stress and work intensity⁴²⁾

Work intensity	Heat load (DI units)		
	Light	Moderate	Severe
Rest	50	100	200
Light	400	500	600
Moderate	500	700	800
Heavy	850	1,000*	1,250*

Add 300 ml/h for working in the sun.

*Theoretical values, since physical work is not tolerable.